

Permaflor BGM600-G

Tested in accordance with PSA MOB PF2 PS/SPU for raised access floors




Medium Grade Panel

For: General Office use

Our lowest Global Warming Potential, GWP, raised access flooring system.

This fully encapsulated panel comprises of a steel top and base plate that are adhesive bonded and mechanically pressed around an FSC® certified high density particle board core for greater strength and durability.

It is designed to be gravity laid with complete electrical continuity and has a high resistance to damage.

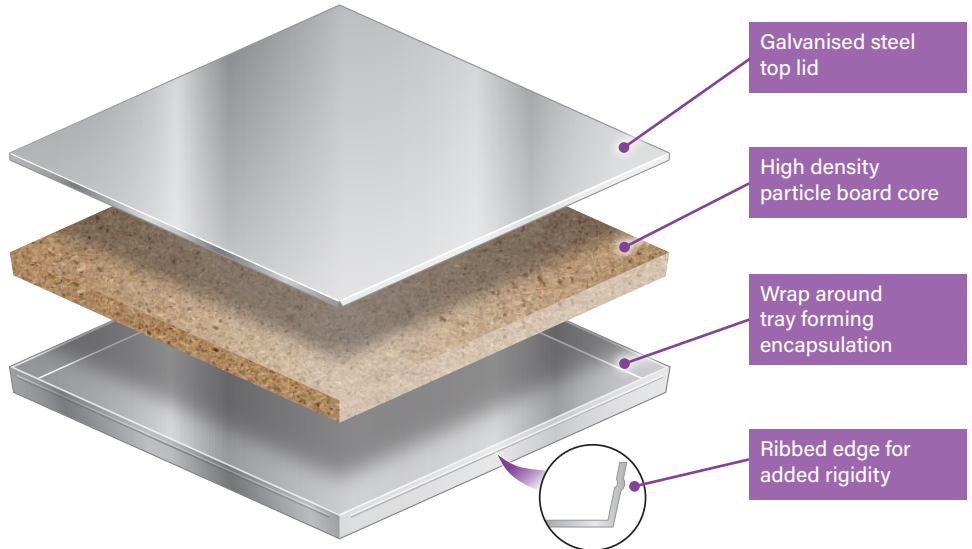


Panels			
PRODUCT CODE	PANEL GRADE	THICKNESS (Nominal)	SYSTEM WEIGHT
BGM600	Medium	31mm	33kg/m ²

System Performance		
POINT LOAD 25mm ²	LOAD OVER 300mm ²	(UDL) Uniformly Distributed Load
3.0 kN	4.5 kN	8.0 kN

Acoustic Performance					
AIRBOURNE			IMPACT		
Bare	Covering	Barrier	Bare	Covering	Barrier
42 dB	45 dB	51 dB	68 dB	55 dB	56 dB

Technical	
FIRE PERFORMANCE	Class 'O' spread of flame, BS476-6, BS476-7 and EN13501 :2016 REACTION - EN13501:1:2018 Bfl-s1 RESISTANCE - EN 13501-2:2016 REI30r
KEY DIMENSIONAL	Length: ± 0.4mm; Square: 600×600 ± 0.5mm; Thickness ± 0.5mm.

Pedestal Options



Steel pedestals are electro plated and coated with an environmentally friendly clear passivation.

BH Void Range 26 - 675mm
BX Void Range 75 - 1525mm

Pedestal caps available for all requirements and include a brass insert for electrical continuity. Pivot pedestal head and nickel plated pedestals also available.

Screw Down Option

This system is available with pre-drilled holes allowing the panels to be screwed down to the pedestals whilst still providing full access to the floor void. (Please see separate datasheet)

Underfloor Plenum

This system can be supplied with neoprene gaskets to minimise air loss through the raised floor surface from the underfloor plenum to aid air circulation, distribution and management.

Stringers

Recommended for additional lateral stability in the following applications:

- 600-800mm void heights: Clip-on stringer system
- >800mm void heights: Screw-down stringer system

Warranty only valid when a full Bathgate Access Floor system including panels and understructure is installed.

* Acoustic performance is expected to perform in excess of these figures based on the density and thickness of the particleboard. (figures shown are based on tests for the 30mm steel encapsulated panel).

- Finished floor heights from 60mm to 1200mm are available using standard pedestals. For heights outside of this range alternative pedestals are available.
- Structural performance based upon a full Bathgate system i.e. panels & pedestals.
- All point and UDL loads perform to a 3x safety factor.



ISO 14001



The mark of responsible forestry

Supply & Install 01432 347 700 info@bathgateflooring.co.uk

Supply Only 01432 347 722 supplyonly@bathgateflooring.co.uk

Bathgate Flooring Unit 6G Thorn Business Park Hereford HR2 6JT

bathgateflooring.co.uk